

SPIKECAM >>>



**SPIKECAM Body Camera
USER MANUAL**

Model: H88

<https://www.spikecam.com>



SPIKECAM >>>

Dear Valued Customer,

We sincerely appreciate your decision to select our product. To ensure you make the most of this product, we kindly urge you to thoroughly read the user manual and retain it for future reference.

For your convenience, we have prepared brief video tutorials lasting only a few minutes. You can access these tutorials by visiting

<https://www.spikecam.com/h88>

or by scanning the QR code provided below. Should you have any inquiries or require assistance, please do not hesitate to reach out to our dedicated customer service team at info@spikecam.com, and we assure you a response within 24 hours.

Once again, thank you for choosing SPIKECAM.

Warm regards,
The SPIKECAM Team



Scan to watch training video
<https://www.spikecam.com/h88>

Contents

1. Quick Start Guide
2. Product Components and Functions
3. Basic Operation
4. Smartphone Connection and App Operation
5. Storage Card and Device Maintenance
6. Advanced Settings
7. Technical Specifications
8. FAQs and Support
9. Optional Accessories List

1.Quick Start Guide

Step 1: Charging

- Connect the camera to a 5V output power adapter or computer using the included Type-C USB cable. (To protect the environment, we do not provide a power adapter. If you need one, please contact our customer service)

Indicator: Red LED steady → Charging; Red LED off → Fully charged.
(Fully charge before first use recommended).

Step 2: Installing the Memory Card



1. Insert a Class 10 or higher microSD card (e.g., SanDisk Ultra 32GB) according to the provided illustration.
2. A "click" indicates correct installation. 📢 **Warning:** Incorrect insertion may damage the camera!
3. Skip this step if your package already includes a memory card.


Step 3: Power On and Standby

- **Power On:** Press and hold the Power button for 3 seconds (vibration and steady blue LED indicate standby mode).
- **Power Off:** Press and hold again for 3 seconds. The camera automatically powers off after 3 minutes of inactivity.

Step 4: Recording Videos

- **Start/Stop Recording:** Briefly press the Power button in standby → **blue** LED flashes slowly during recording → Press again to stop and automatically save.
- **Emergency Shutdown:** Press and hold the Power button for 3 seconds.

2. Product Components and Functions

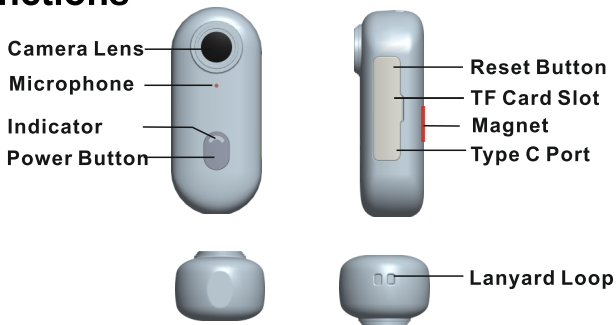

- **Power Button:** Long press to power on/off, short press to start/stop recording.
- **WiFi Button:** In standby mode, double-press Power button to enable/disable WiFi; **green** LED flashes when active.
- **Reset Button:** Press to force restart the camera.


Indicator Light Explanation

LED Color	Status	Meaning
Solid Blue	Standby	Ready for operation
Flashing Blue	Recording	Recording in progress
Flashing Green	WiFi Pairing	Complete pairing within 3 minutes
Solid Red	Charging	Turns off when fully charged


3. Basic Operation

1. Recording While Charging

1. Connecting power will automatically power on the camera.
2. Briefly press the Record button to start recording.

 **Important:** Always stop recording and power off before unplugging the power source to avoid file loss.

Loop Recording

- Automatically overwrites oldest videos when memory is full.
-  Regularly backup important videos to your computer or smartphone.


4. Smartphone Connection and App Operation

1. Connection Steps

- **Download App:** Search "Viidure" in App Store (iOS) or Google Play/Android app store. Alternatively, scan the QR code below for a quick download.






- **WiFi Connection:**
- Double-press Power button → **Green** LED flashes → Connect phone WiFi to "H88_XXXX"; password: **12345678**.



- **Real-time Control:**

- Use the App for live preview, remote photo capture, playback, and downloading/sharing videos.

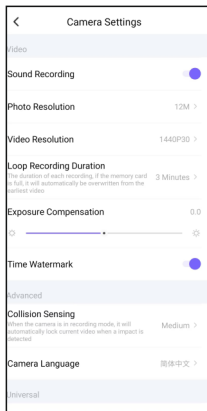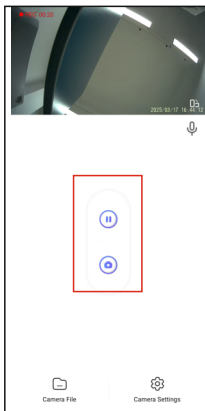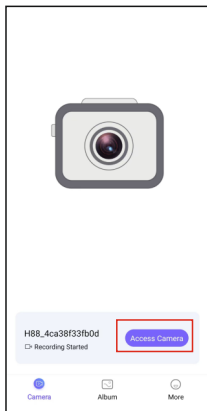

- For more functions, scan the provided QR code at the bottom of manual for detailed video tutorials and online

5. Storage Card and Device Maintenance

Safety Tips


- Only use Class 10 or above Micro SD cards (maximum 512GB).

Computer Connection Mode

- **USB Mode:** Insert microSD → Connect to PC → Manage files directly.

6. Advanced Settings

1. Time Display Setup



1. Connect camera to PC → Edit `time.txt` file in the microSD root directory.
2. Format: **2024-01-01 12:00:00 Y 3**

Field	Example	Meaning
Date	2024-01-01	Year-Month-Day
Time	12:00:00	Hour:Minute:Second
Y/N	Y	Y = Show timestamp; N = Hide timestamp
Number	3	Loop recording segment duration (3 min segment; options: 1, 3, or 5 mins)

- Save and restart the camera.

7. Technical Specifications

Parameter	Specification
Video Resolution	4K / 2K / 1080P
Battery Capacity	800mAh lithium battery
Waterproof Rating	IPX4 (splash-proof for daily use)
Memory Card Support	Micro SD card, up to 512GB
WiFi Transmission Range	5 meters (unobstructed environment)
Loop Recording Segment Length	1 / 3 / 5 minutes (set via time.txt or WiFi APP)
Charging Time	Approximately 1.5 hours
Continuous Recording Time	Approximately 2 hours

8.FAQs and Support

Q1: Unable to Save Files?

- Ensure recording is stopped before powering off.
- Verify if memory card is full or damaged.

Q2: Unstable WiFi Connection?

- Maintain camera-phone distance within 5 meters.
- Minimize WiFi interference from other devices.
- Force shutdown and reconnect WiFi if needed.

Q3: Camera Frozen or Unresponsive?

- Press Reset button to force restart.

Getting Help


- Official Website: SPIKECAM.com
- Support Email: info@spikecam.com
- **All SPIKECAM cameras have a 1-year warranty. Contact us for any quality issues.**
- Scan QR code provided for video tutorials and online manual.



9. Optional Accessories List

Refer to video tutorials for accessory usage instructions.

No.	Accessory Name	Model	Usage
1	Waterproof Case	H88-WP01	Protection for diving/rainy days
2	Bicycle Mount	H88-CM01	Mounted recording while cycling
3	360° Rotatable Clip	H88-BC01	Wearable attachment
4	Magnetic Mount	H88-MG01	Magnetic wearable attachment
5	Helmet Mount	H88-HM01	Helmet attachment
6	0.25-inch Thread Adapter	H88-M6	Converts to standard 1/4" thread
7	Wristband	H88-WB01	Wrist attachment

 **Note:** Scan QR code to access digital manuals and video tutorials!